



8'x4' CONVERSATION SUITE — STC 42

The Zonez 8'x4' Conversation Suite is a purpose-built, private, meeting solution. Ideally suited for two, this thoughtfully designed suite provides a quiet collaboration space for your next one-on-one meeting.

The suite is designed to eliminate outside disturbances by insulating the occupants from unwanted noise by way of a proprietary, sound dampening, wall system. In conjunction with the insulated door frame and dual-pane windows, the suite's engineered wall system achieves an STC sound rating of 42, making outside conversation and other noises barely audible. Users are able to collaborate and accomplish business objectives without distraction.

EXTERIOR MATERIAL

EXTERIOR

Pre-finished, aluminum, clad composite

GLASS

Flush, dual-pane | 1/4" tempered, 1/4" laminated

FRAME

Extruded 6063 aluminum alloy

DOOR

3068 (36" x 80") aluminum storefront type | fully insulated aluminum channels | chrome pull handles

INTERIOR MATERIAL

WALLS

Sandwich panel containing a recycled foam core and laminated, acoustic felt/rPET.

CEILING

Proprietary STC 42 grid ceiling, optional melt-away ceiling tiles, or open metal grid system.

FLOORING

21oz. polyester, low loop, jacquard, carpet tiles. Each 50cm x 50cm square.

ELECTRICAL

All suites are plug and play. A 10 foot extension cord is included. 110v outlets and integrated USB charging ports are standard.

LIGHTING

2'x2' LED panel, 2400lm @ 40W

AIR QUALITY AND FLOW

FANS


Proprietary in wall, intake and exhaust air flow system to maximize air exchanges and comfort. Quiet dual intake and exhaust fans. 156 CFM. 21dBA

AIR CHANGES PER HOUR

39 air exchanges per hour/one every 92 seconds.

OPTIONAL CLEAN ZONEZ AIR PURIFIER

Visit <https://cleanzonez.com/> for more information

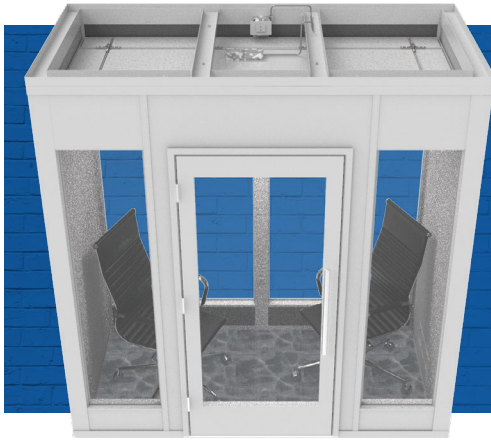

- Three ceiling options provide users the flexibility to match their suite with local fire suppression ordinances.
- Dual pane windows keep sound out while providing a sense of spaciousness.
- Door and window channels seal are insulated to prevent sound infiltration.
- Comprehensive, 10-year warranty.
- All units are shipped ready to be assembled on-site.
- Fast installation to minimize the disruption.

FINISHES

EXTERIOR WALL FINISHES



C-90-Black



C-02-White



C-05 Brushed Aluminum

iPET INTERIOR WALL FINISHES



P91-Lt Gray



P92-Med Gray



P02-Drk Gray



P01-Black

FRAME FINISHES



BL-Black



SW-White



CL-Clear Satin

FLOORING



Dark Gray Carpet

MEASUREMENTS

DIMENSIONS

	Width IN/CM	Depth IN/CM	Height IN/CM
Exterior Dimensions	96"/243.84	48"/121.92	99.5"/252.73
Interior Dimensions	89"/226.06	41"/104.14	90"/228.6

WEIGHT

	Shipping lbs./Kg.	Assembled lbs./Kg.
Weight	1000/453.59	860/390.09

POWER

Power Supply	120V AC
Total Amps	0.03 Amps
Watts Per Hour	3.6 Watts Per Hour
Kilowatts Per Hour	0.0036 Kilowatts Per Hour

CERTIFICATES

UL Classified US, CAN
 Class A Fire Rated
 ASTM E84 PET Polyester Fiber Acoustic Panel US, CAN
 TB117 Smolder Resistance of Materials Test US, CAN

